



Detail B
1:5

- 1. All In One Glazing Retainer
- 2. Thermally Broken Eaves Beam

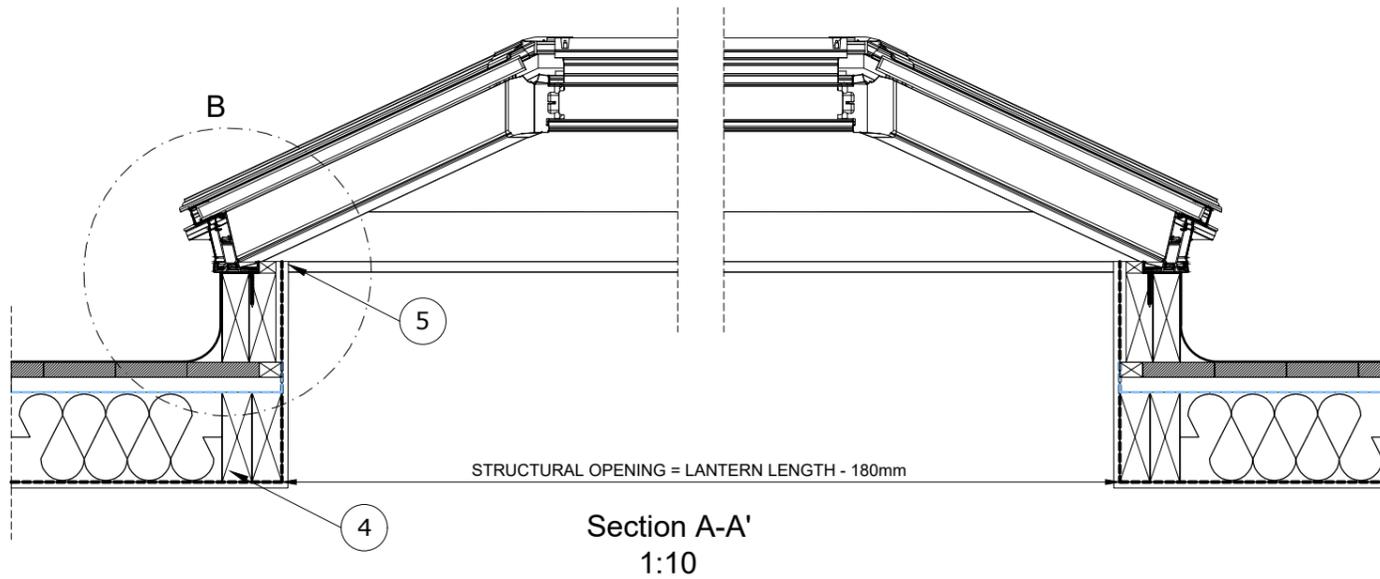


Section A-A'
1:10

STRUCTURAL OPENING = LANTERN LENGTH - 180mm

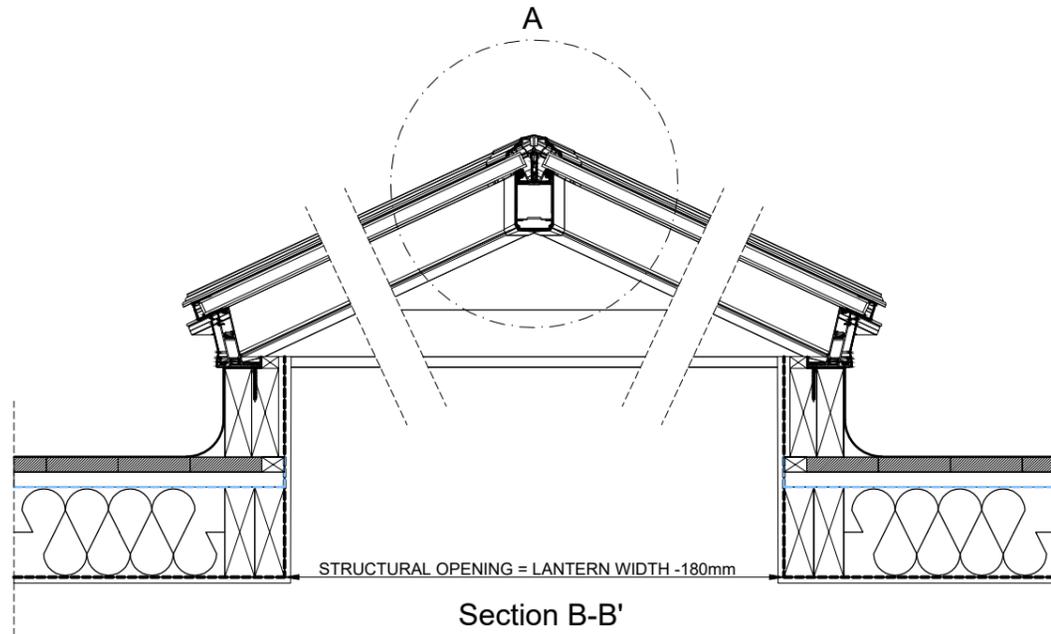

Section B-B'
1:10


STRUCTURAL OPENING = LANTERN WIDTH - 180mm

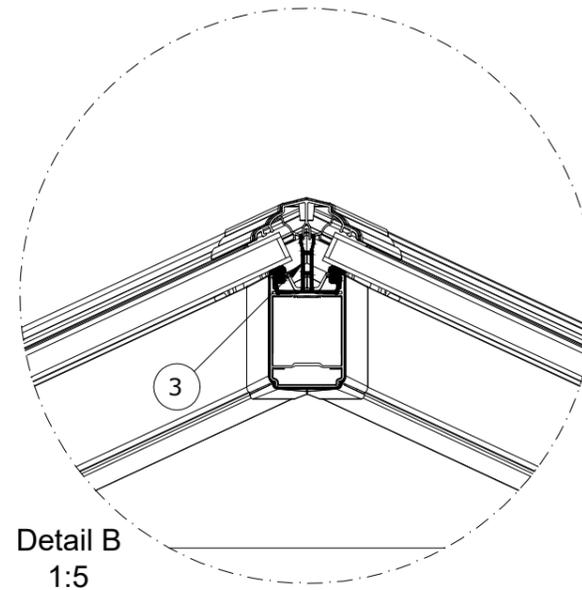

Detail B
1:5

3. Thermal PVC T-Bar

- 4. Double Trimmer (where necessary)
- 5. Edge Bead (Supplied by others)

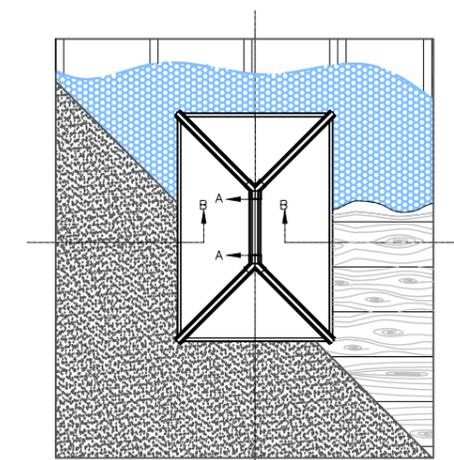

INDICATIVE SECTIONAL VIEW

	This drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Roof constructions needs to be right with current building regulations. Keylite is not responsible for or the installation quality on the roof. Documentation only for personal use. Copying and sharing without permission is prohibited.		
		Frame Type 	Size Range (LxW) 1500 x 1000mm 2000 x 1000mm 2000 x 1500mm 2500 x 1500mm



ADLUX Industries Ltd. ©
 36 Olive Road, Penrose
 P.O. Box 13866, Auckland.
 New Zealand.
 Ph: (09) 636 6866
 Fax: (09) 636 6846
 email: sales@adlux.co.nz

LANTERN ROOF LIGHT

DATE: 20/07/20

DWG No: FRL 1-4